

FOR THE WINNERS' CIRCLE

anda seat

X-AIR MESH CHAIR










ASSEMBLY INSTRUCTIONS
AND USER GUIDE



Thank you for choosing AndaSeat!


Before using this product, please read this manual carefully
and keep it available for future reference.

🔑 WHAT'S IN THE BOX


Ⓐ  Headrest ×1	Ⓑ  Backrest ×1	Ⓒ  Seat Base ×1
Ⓓ  Armrests×2	Ⓔ  Tilt Mechanism×1	Ⓕ  Gas Piston×1
Ⓖ  Wheelbase×1	Ⓗ  Casters×5	Ⓘ  M8×16 Bolts & Washers×3
Ⓙ  M6×25 Bolts & Washers ×6	Ⓚ  M6×16 Bolts ×2	Ⓛ  M5 & M4 Hex Wrench×1

🔑 ASSEMBLY STEPS


① Flip the wheelbase over and press the casters into the wheelbase.

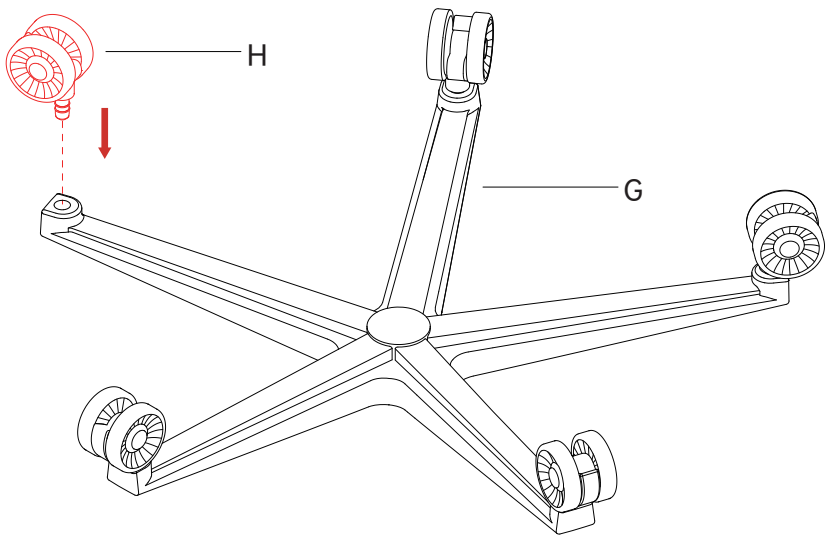


② Turn the wheelbase right side up, then insert the gas piston in the middle.

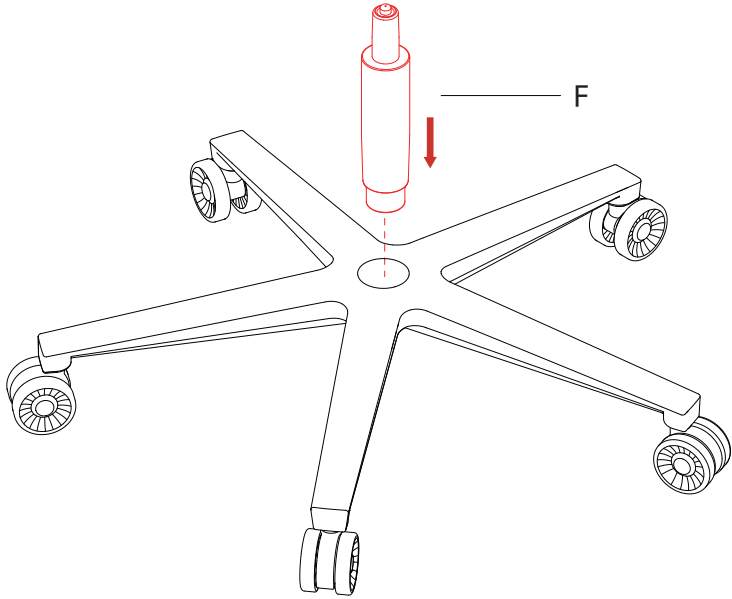


③ Flip the seat base over, remove the pre-installed M6×16 bolts and washers.

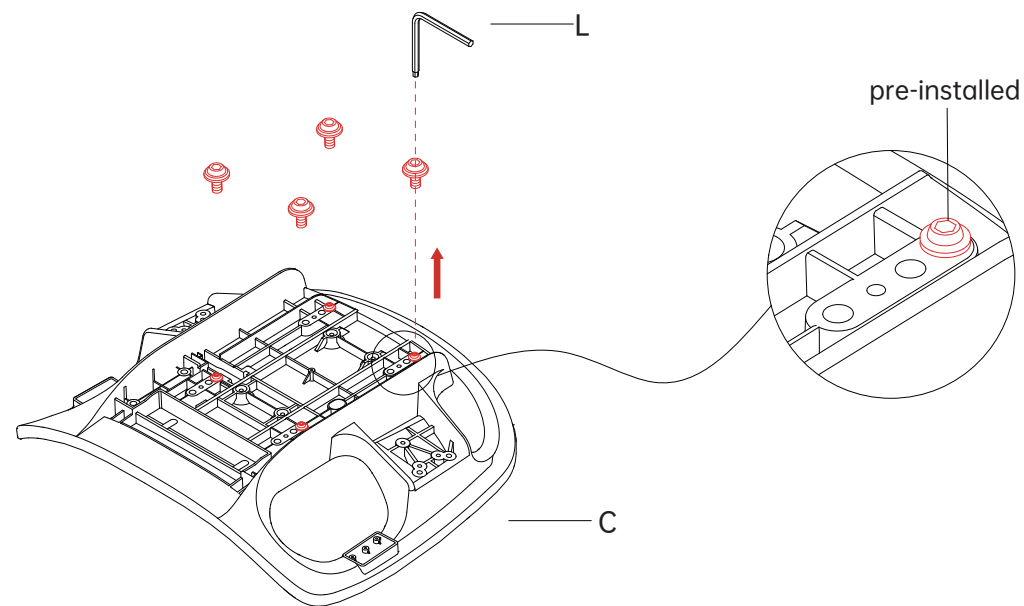


④ Install the tilt mechanism using the M6×16 bolts and washers removed in step ③.

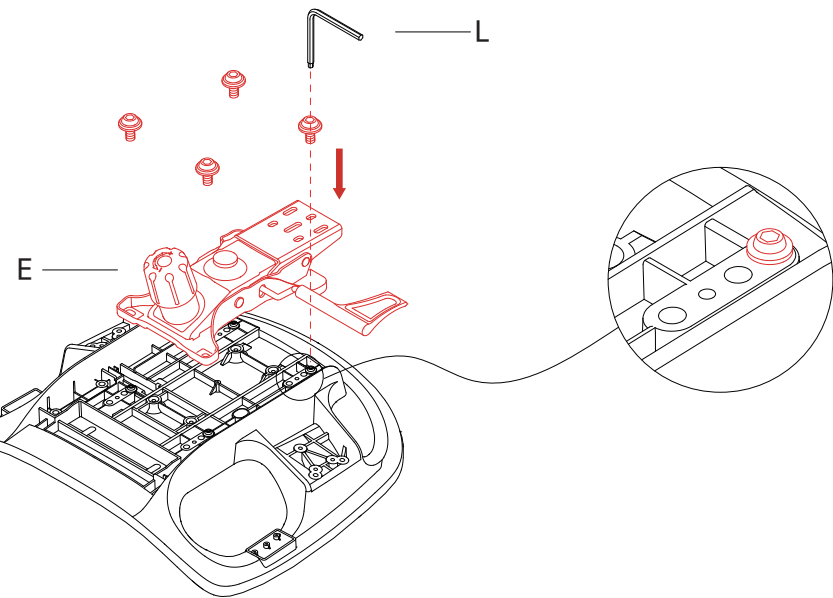


⑤ Align the backrest to the seat base and secure them with M8×16 bolts and washers.

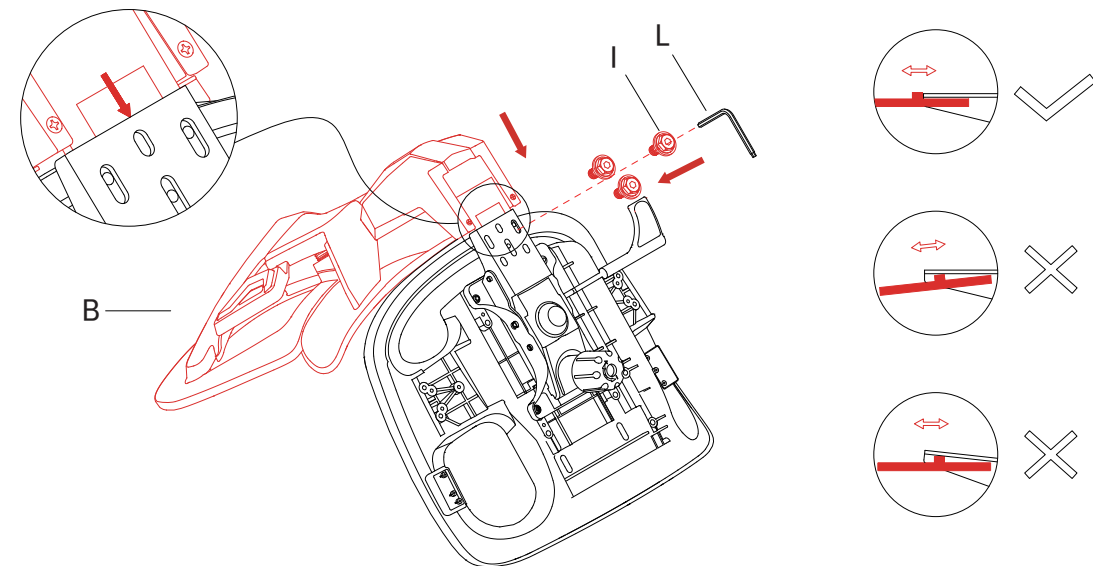


⑥ Mount the armrests with M6×25 bolts and washers. Make sure to correctly identify the left and right armrests.

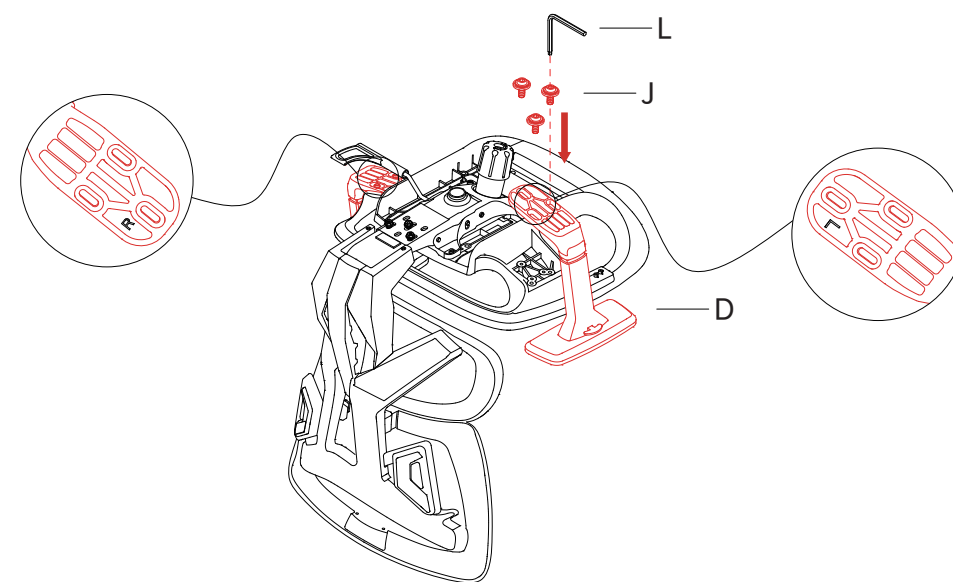


⑦ Attach the headrest onto the backrest with M6×16 bolts.

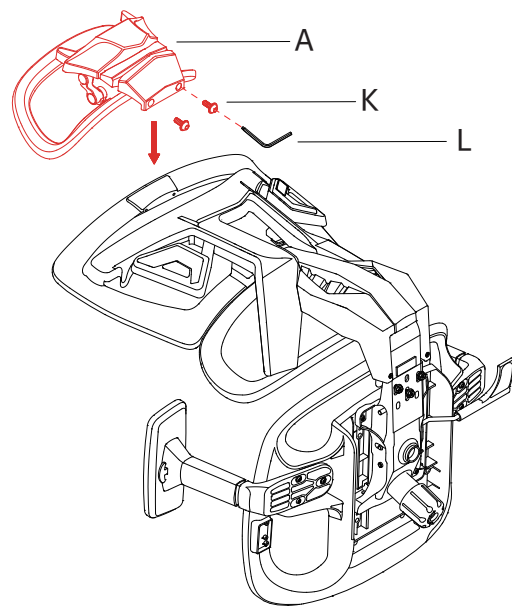


⑧ Lift the assembled wheelbase and correctly insert the gas piston into seat.

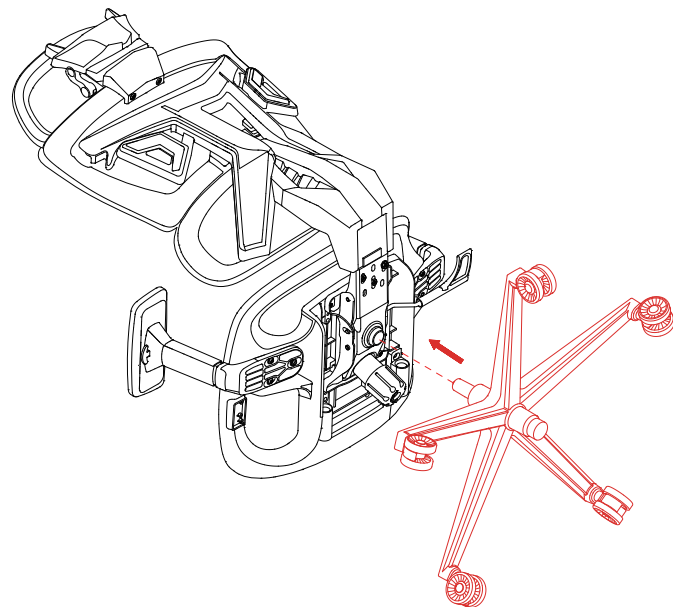


⑨ Turn the chair upright to complete the assembly.

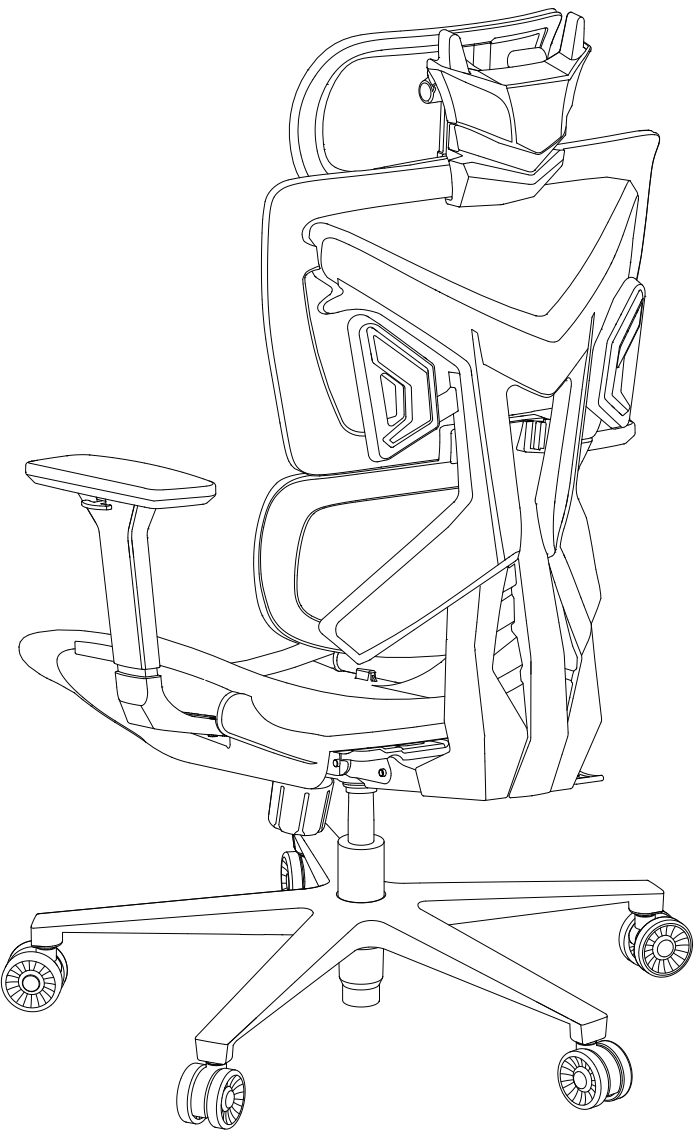

⊕ FEATURES

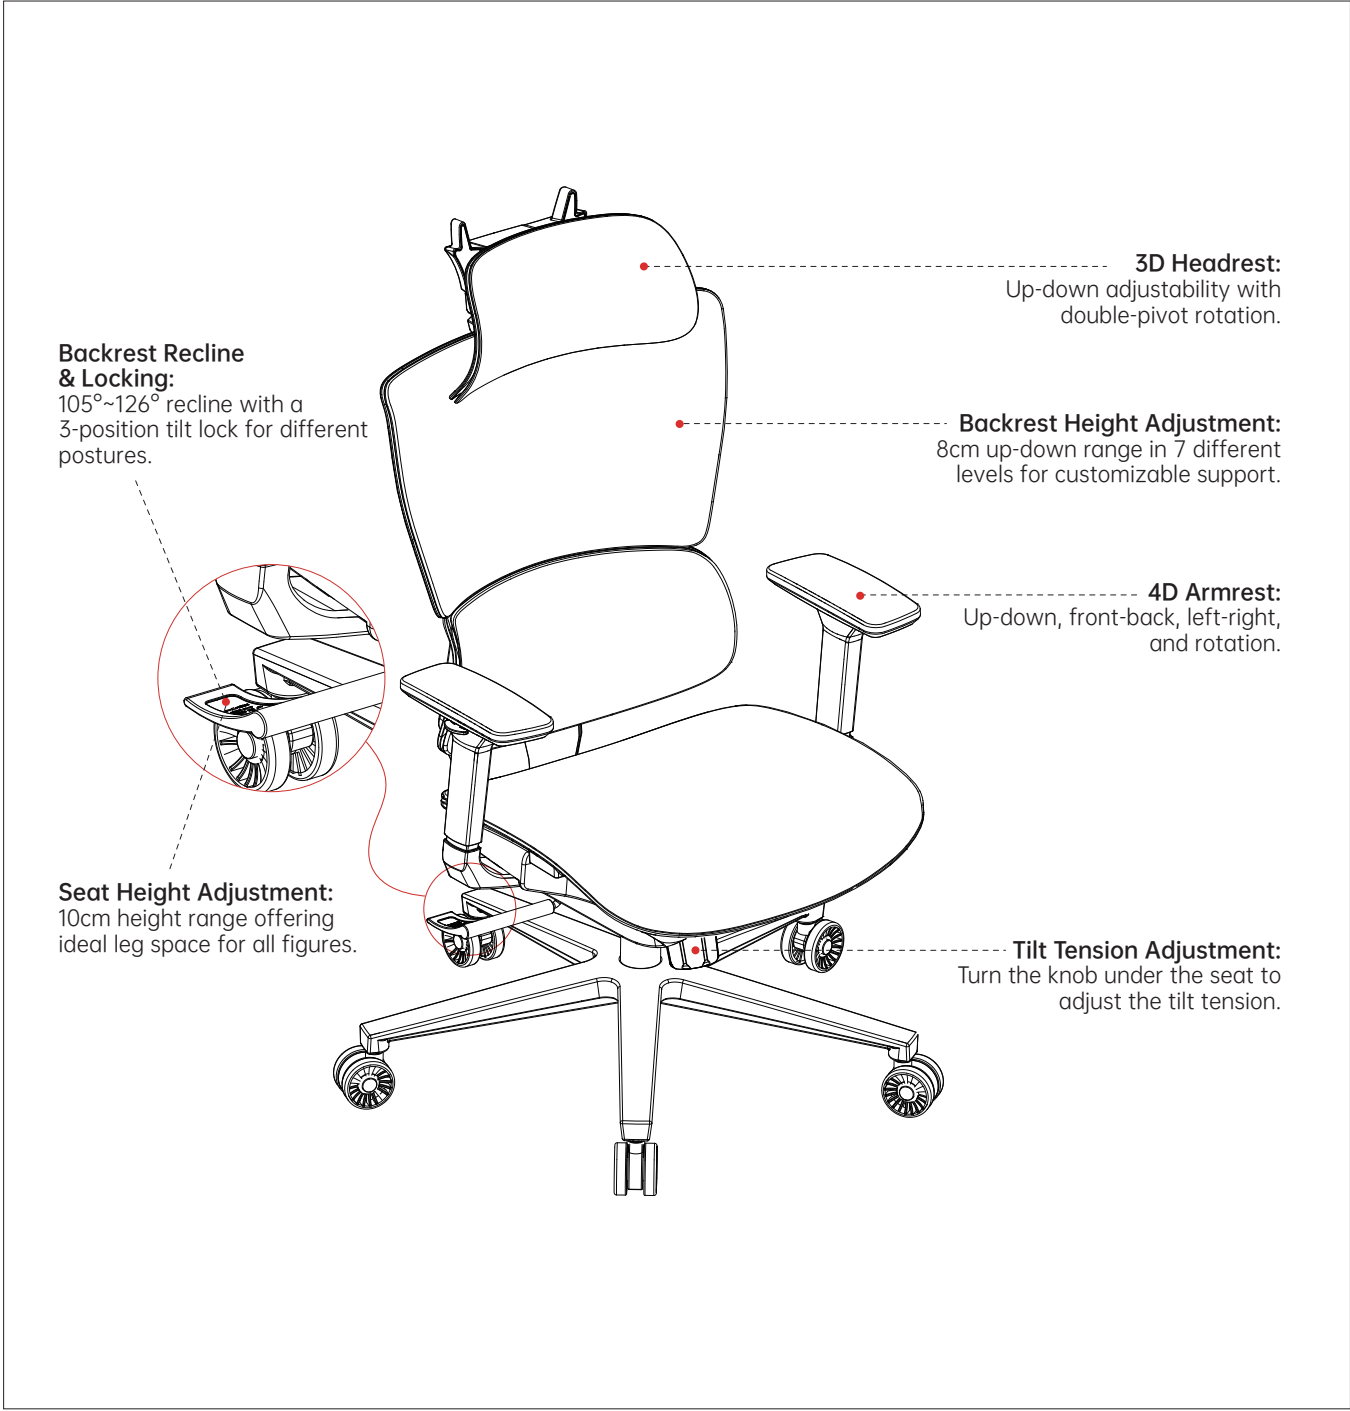

☰ HOW TO ADJUST

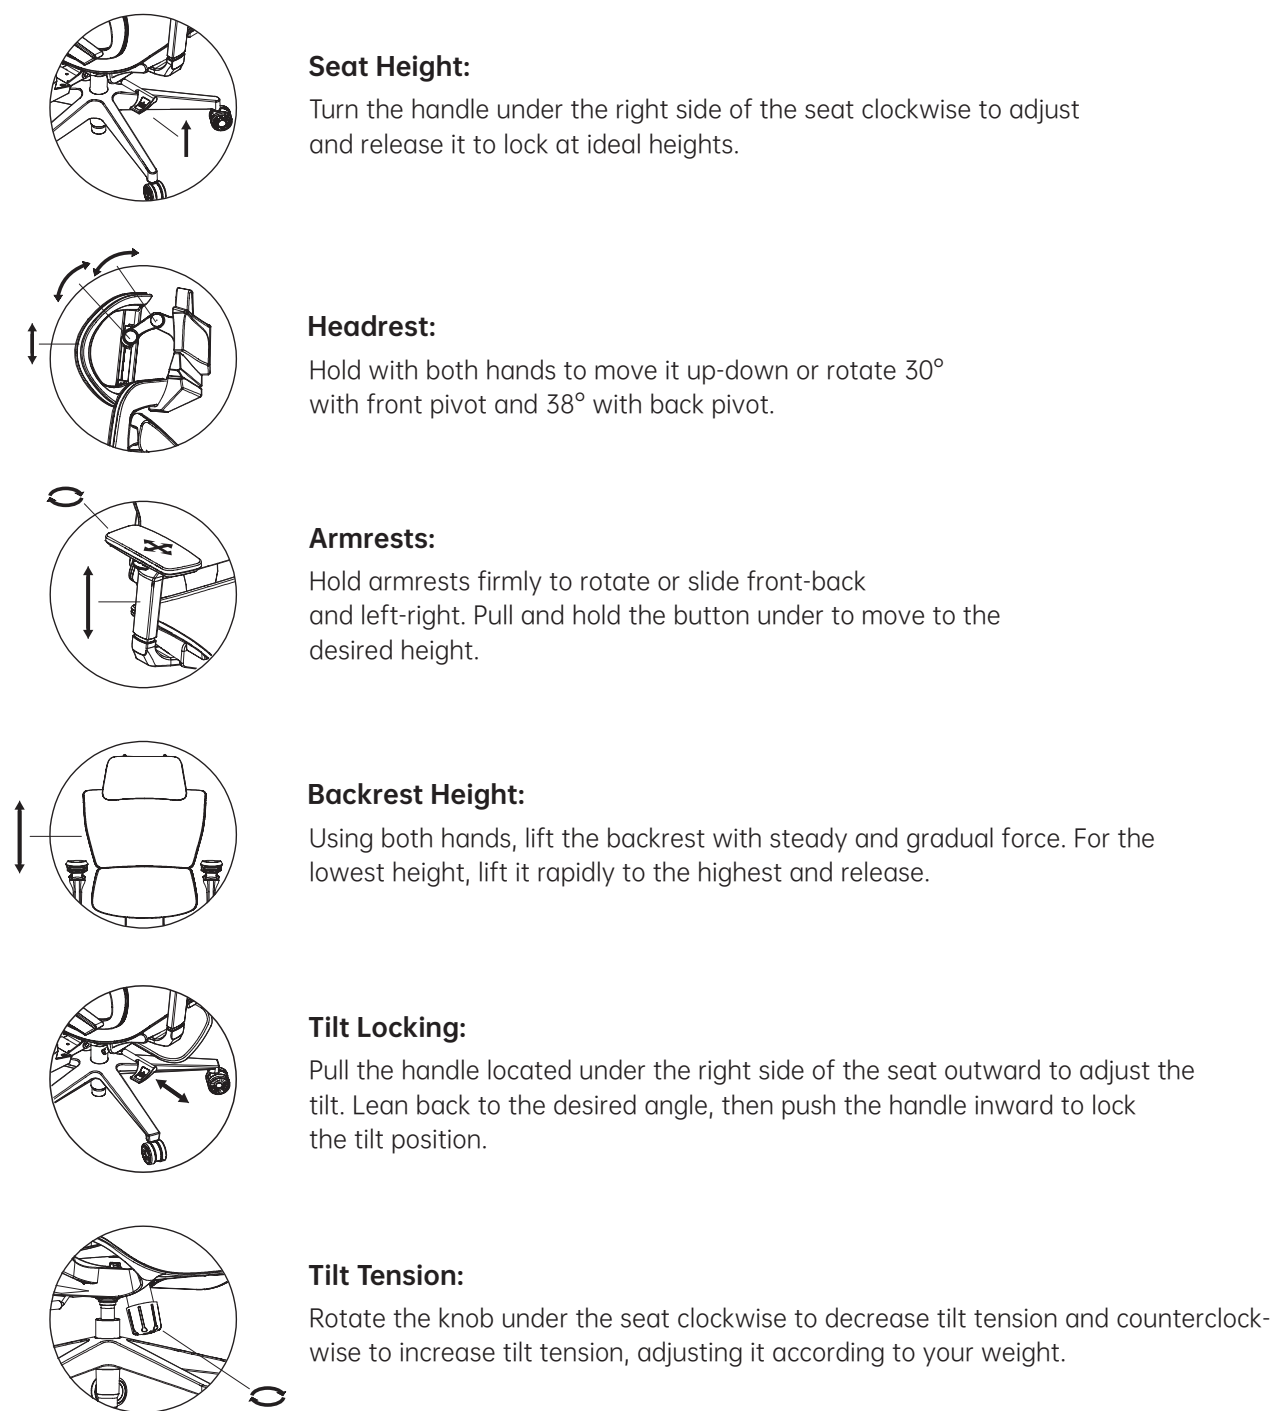

❗ ASSEMBLY TIPS

1. Closely follow the Assembly Steps and refer to the illustrations for correct assembly.
2. Check every component in the box and confirm they are in working condition.
3. Safety gloves are recommended for assembly.
4. To prevent accidental component damage, assemble on a clean, even surface with a protective layer.
5. To prevent misalignment or uneven tightening, install each bolt halfway, adjust if needed, then fully tighten.
6. The gas piston stays tight in place once it's assembled.
If you need to disassemble the chair and pack it for transportation:
 1. Lay it on its side, hold the gas piston firmly, and lightly twitch the seat or tap on its back side with a rubber hammer until it detaches from the gas piston.
 2. Then tap on the wheelbase to get it loose from the gas piston.**Note:** Please take safety precautions during this process. Any damage or safety issue that occurs from it is not covered by this product's warranty.

⚠ USAGE TIPS

1. This is a single-person chair. Use it with only one person at a time.
2. Ensure all components are securely fastened before use. Inspect bolt tightness every 3 months to maintain safety.
3. Place the chair on a level surface. Avoid prolonged exposure to excessive moisture, heat, or direct sunlight.
4. For seated use only. Do not stand on the chair or sit on its armrests.
5. Clean the chair's surface before your first use. Wipe with a soft cloth only.
6. Avoid cleaners with high acid or alkaline, as they may corrode or damage the chair surface.
7. Use the chair features as shown in the How To Adjust section.
8. While reclining, lean back gradually and keep yourself balanced. Flinging back too hard or too far might cause tipping.
9. Do not take apart the gas piston for safety.